



MADE IN INDIA

LED LIGHTING CATALOGUE 2022-23




Our Presence



**States & U. T.
Illuminated**



**SKUs (India's Widest
LED Lighting Range)**

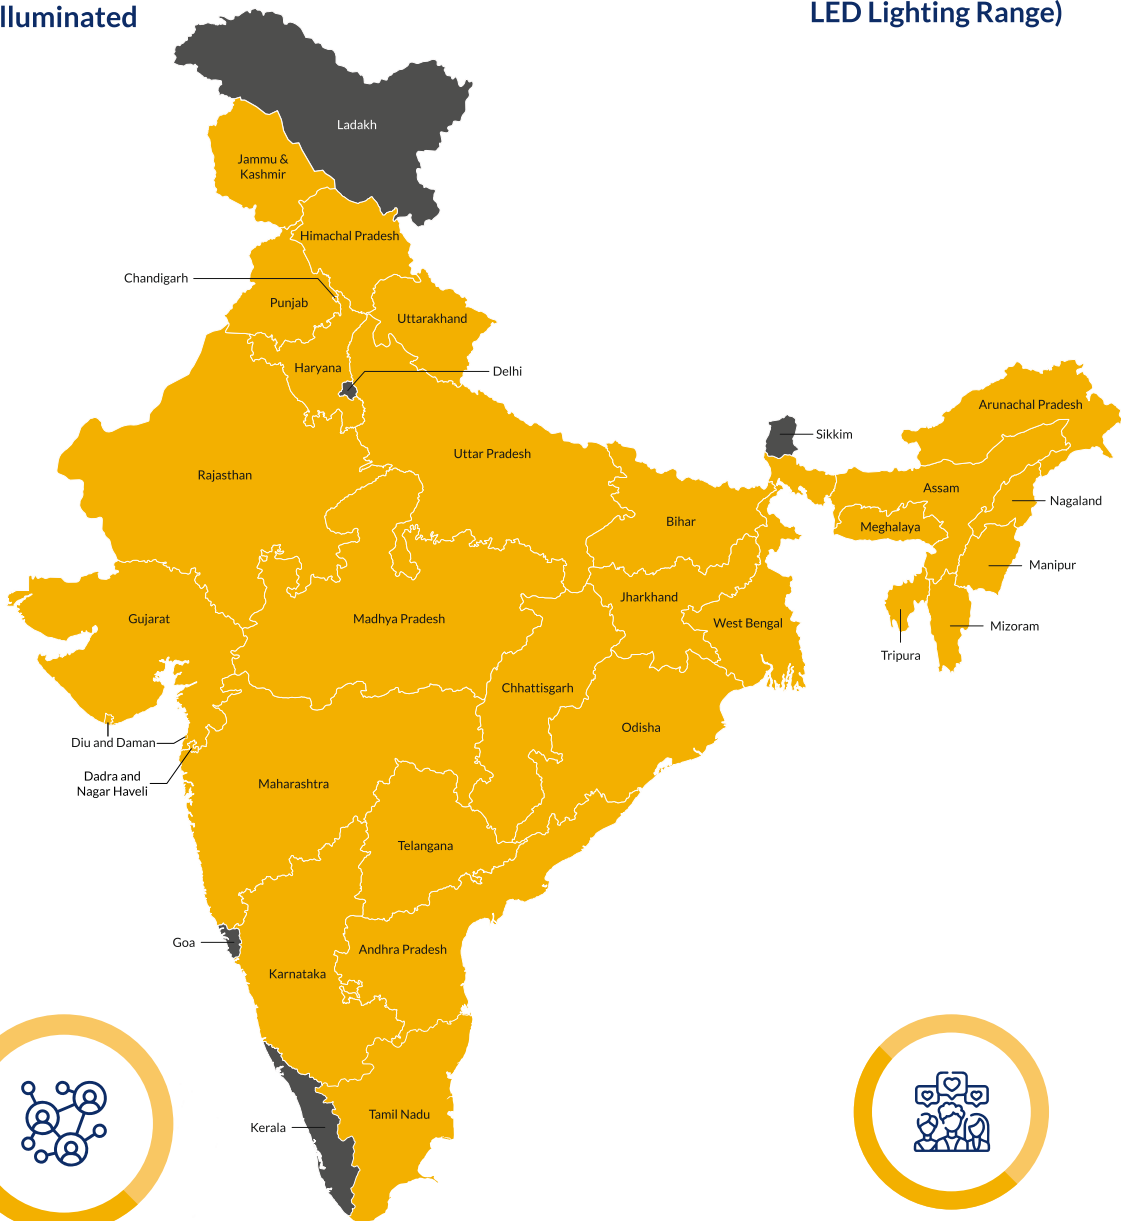

















**Happy & Satisfied
Channel Partners**




**Trusted By
Continuously Growing
Millions Of Customers**

Contents

i) LED Lighting Catalogue

	LED Panel Lights	4 - 8
	LED Junction Box Lights	8 - 9
	COB Spot Lights	9 - 14
	LED Office Lights	14 - 15
	LED Bulkheads	15
	LED Flood Lights	16 - 17
	LED Street Lights	18 - 19
	LED Highbay Lights	19 - 20
	Picture & Mirror Lights	20
	Ceiling Lights	21
	Spot Lights	21 - 22
	Track Lights	22 - 23
	Wall Lights	23 - 28
	Foot Lights	28 - 29
	SMD Strip & Rope Lights	29 - 30
	Accessories	30

CRD50
(SQ / RO)



Wattage	6W	12W	18W	24W
Type	Recessed Backlit Panel Light			
Dimension (D×H) (mm)	120×25	150×25	170×25	200×25
Cutout (mm)	98	125	150	175
CCT	3K 4K 6K			
Body Material	Aluminium PDC			
Optical Cover	PS Diffuser			
LED Life Span	50000 Hours			
Luminous Flux (lm)	600	1200	1800	2400
CRI	≥ 80			
Driver	External			
PF	≥ 0.95			

AQUA
CRD50/B
(SQ / RO)



Wattage	8W	12W	18W	24W
Type	Recessed Backlit Panel Light			
Dimension (D×H) (mm)	120×25	150×25	170×25	200×25
Cutout (mm)	98	125	150	175
CCT	3K 4K 6K & 3 STEP			
Body Material	Aluminium PDC			
Optical Cover	Polycarbonate			
LED Life Span	50000 Hours			
Luminous Flux (lm)	800	1200	1800	2400
CRI	≥ 80			
Driver	External			
PF	≥ 0.95			

GALAXY+
CRD150
(SQ / RO)



Wattage	12W	18W	24W
Type	Deep Recessed Down Light		
Dimension (D×H) (mm)	147×48	168×48	198×48
Cutout (mm)	125	145	175
CCT	3K 4K 6K & 3 STEP (Only in 12W & 18W)		
Body Material	Aluminium PDC (Frame - PC)		
Optical Cover	PS Diffuser		
LED Life Span	50000 Hours		
Luminous Flux (lm)	1200	1800	2400
CRI	≥ 80		
Driver	External		
PF	≥ 0.95		

CRD140
(SQ / RO)



Wattage	12W	18W	24W
Type	Adjustable Rimless Diffuser Panel Light		
Dimension (D×H) (mm)	120×15	170×15	223×15
Cutout (Adj.) (mm)	75 - 100	75 - 150	75 - 200
CCT	4K 6K		
Body Material	Aluminium PDC		
Optical Cover	Polycarbonate		
LED Life Span	50000 Hours		
Luminous Flux (lm)	1200	1800	2400
CRI	≥ 80		
Driver	External		
PF	≥ 0.95		

HYDROGEN
CRD90
(SQ / RO)



Wattage	8W	15W	22W
Type	Recessed Backlit Panel Light		
Dimension (D×H) (mm)	112×25	167×25	208×25
Cutout (mm)	98	152	188
CCT	3K 4K 6K		
Body Material	Polycarbonate		
Optical Cover	PS Diffuser		
LED Life Span	50000 Hours		
Luminous Flux (lm)	800	1500	2200
CRI	≥ 80		
Driver	External		
PF	≥ 0.95		

OSYCEAN
SG260
(SQ / RO)



Wattage	9W	12W	15W	22W
Type	Recessed Backlit Panel Light			
Dimension (D×H) (mm)	112×25	167×25	167×25	208×25
Cutout (mm)	105	125	140	195
CCT	3K 6K			
Body Material	Polycarbonate			
Optical Cover	PS Diffuser			
LED Life Span	50000 Hours			
Luminous Flux (lm)	810	1080	1350	1980
CRI	≥ 80			
Driver	Integral			
PF	≥ 0.95			

SIGMALIGHTING
Premium
SG110 - 3 Step Panel
(SQ / RO)



Wattage	6W	12W	18W
Type	3 Step Slim Recessed Edgelit Panel Light		
Dimension (D×H) (mm)	120×20	175×20	225×20
Cutout (mm)	108	155	205
CCT	6K + 3K + 4K		
Body Material	Aluminium PDC		
Optical Cover	PS Difuser		
LED Life Span	50000 Hours		
Luminous Flux (lm)	480	960	1440
CRI	≥ 80		
Driver	External		
PF	≥ 0.50		

SIGMALIGHTING
Premium
SG110
(SQ / RO)



Wattage	3W	6W	12W	15W	18W	24W (SQ)
Type	Slim Recessed Edgelit Panel Light					
Dimension (D×H) (mm)	85×20	120×20	175×20	225×20	299×23	
Cutout (mm)	75	108	155	205	280	
CCT	3K 4K 6K (RD GR BL PK Only in 3W & 6W Roud)					
Body Material	Aluminium PDC					
Optical Cover	PS Diffuser					
LED Life Span	50000 Hours					
Luminous Flux (lm)	240	480	960	1200	1440	1920
CRI	≥ 80					
Driver	External					
PF	≥ 0.50			≥ 0.95		




SG210
(SQ / RO)



Wattage	6W	12W	18W
Type	Edgelit Surface Panel Light		
Dimension (D×H) (mm)	120×31	165×31	210×31
CCT	3K 4K 6K		
Body Material	Aluminium PDC		
Optical Cover	PS Difuser		
LED Life Span	50000 Hours		
Luminous Flux (lm)	480	960	1440
CRI	≥ 80		
Driver	External		
PF	≥ 0.50	≥ 0.95	

SG810

(SQ / RO)



Wattage	7W	10W	15W	20W	24W
Type	Rimless Edgelit Recessed Panel Light				
Dimension (D×H) (mm)	95×21	120×21	145×21	170×21	223×21
Cutout (mm) (SQ/RO)	75/75	85/85	130/130	155/155	205/205
CCT	3K 4K 6K				
Body Material	Aluminium PDC (Frame - PC)				
Optical Cover	PS Diffuser				
LED Life Span	50000 Hours				
Luminous Flux (lm)	630	900	1350	1800	2160
CRI	≥ 80				
Driver	External / Integral				
PF	≥ 0.50			≥ 0.95	

SG910

(SQ / RO)



Wattage	7W	10W	15W	20W	24W
Type	Rimless Edgelit Surface Panel Light				
Dimension (D×H) (mm)	95×23	120×25	145×25	170×25	220×25
CCT	3K 4K 6K				
Body Material	Aluminium PDC (Frame - PC)				
Optical Cover	PS Difuser				
LED Life Span	50000 Hours				
Luminous Flux (lm)	630	900	1350	1800	2160
CRI	≥ 80				
Driver	External / Integral				
PF	≥ 0.50			≥ 0.95	

SG510

(SQ / RO)




Wattage	4W	6W	12W	18W
Type	Two Color Step Recessed Panel Light			
Dimension (D×H) (mm)	90×25	100×25	142×25	192×25
Cutout (mm) (SQ/RO)	50/50	73/68	103/106	153/156
CCT	6K + BL GR OR PK PGB (OR & PGB except 4W)			
Body Material	Aluminium PDC			
Optical Cover	PS Diffuser + Frame - Acrylic			
LED Life Span	50000 Hours			
Luminous Flux (lm)	320	480	960	1440
CRI	≥ 80			
Driver	External			
PF	≥ 0.50			

SG610
(SQ / RO)




Wattage	6W	12W	18W
Type	Two Color Step Surface Panel Light		
Dimension (D×H) (mm)	102×33	143×33	192×33
CCT	6K + BL PK PGB		
Body Material	Aluminium PDC		
Optical Cover	PS Diffuser + Frame - Acrylic		
LED Life Span	50000 Hours		
Luminous Flux (lm)	480	960	1440
CRI	≥ 80		
Driver	External		
PF	≥ 0.50		

CRM20
(SQ)



Wattage	36W	48W
Type	2x2 Slim Recessed Backlit Panel Light	
Dimension (L×W×H) (mm)	595×595×35	
CCT	3K 4K 6K	
Body Material	CRCA Metal (Aluminium Frame)	
Optical Cover	PS Diffuser	
LED Life Span	50000 Hours	
Luminous Flux (lm)	3600	4800
CRI	≥ 80	
Driver	External	
PF	≥ 0.95	

CRM10
(SQ)



Wattage	15W (1×1)	20W (1×2)	36W (2×2)	48W (2×2)
Type	Recessed Backlit Panel Light			
Dimension (L×W×H) (mm)	295×295×75	295×595×75	595×595×75	595×595×75
CCT	3K 4K 6K			
Body Material	Aluminium Sheet Metal			
Optical Cover	PS Difuser			
LED Life Span	50000 Hours			
Luminous Flux (lm)	1500	2000	3600	4800
CRI	≥ 80			
Driver	External			
PF	≥ 0.95			

CRM10/B
(SQ)



Wattage	36W	48W
Type	2x2 Surface Backlit Panel Light	
Dimension (L×W×H) (mm)	595×595×75	595×595×75
CCT	3K 4K 6K	
Body Material	Aluminium Sheet Metal	
Optical Cover	PS Difuser	
LED Life Span	50000 Hours	
Luminous Flux (lm)	3600	4800
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.95	

CRD60
(SQ / RO)



Wattage	18W	30W	48W	6W	12W	18W	24W
Type	Surface Backlit Panel Light						
Shape	Square			Round			
Dimension (D×H) (mm)	178×57	250×57	280×57	93×57	123×57	143×57	173×57
CCT	3K 4K 6K						
Body Material	Aluminium PDC			Aluminium Spinning			
Optical Cover	PS Diffuser						
LED Life Span	50000 Hours						
Luminous Flux (lm)	1800	3000	4800	600	1200	1800	2400
CRI	≥ 80						
Driver	External						
PF	≥ 0.95						

IGNIS
SG240



Wattage	3W	12W
Type	Junction Box Light	
Dimension (D×H) (mm)	67×29	144×41
Cutout (mm)	45	120
CCT	3K 4K 6K (RD, GR, BL, PK only in 3W)	
Body Material	Polycarbonate	
Optical Cover	Polycarbonate	
Luminous Flux (lm)	270	1080
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.50	

IGNIS+
CRC240/A



Wattage	6W
Type	Junction Box Light
Dimension (D×H) (mm)	110×40
Cutout (mm)	80
CCT	3K 4K 6K RD GR BL PK
Body Material	Polycarbonate
Optical Cover	Polycarbonate
Luminous Flux (lm)	600
CRI	≥ 80
Driver	Integral
PF	≥ 0.50

VENUS
CRC80



Wattage	7 + 7W
Type	Two Color Step Junction Box Light
Dimension (D×H) (mm)	109×36
Cutout (mm)	75
CCT	6K + 3K RD GR BL PK PL
Body Material	Polycarbonate
Optical Cover	Polycarbonate
Luminous Flux (lm)	560
CRI	≥ 80
Driver	Integral
PF	≥ 0.60

MARS
CRC100



Wattage	7 + 7W
Type	Two Color Step Junction Box Light
Dimension (D×H) (mm)	85×24
Cutout (mm)	45
CCT	6K + 3K RD GR BL PK PL
Body Material	Polycarbonate
Optical Cover	Polycarbonate
Luminous Flux (lm)	560
CRI	≥ 80
Driver	Integral
PF	≥ 0.60

PLUTO
CRC40



Wattage	3W	5W	7W
Type	Junction Box Light		
Dimension (D×H) (mm)	80×40	100×50	
Cutout (mm)	50	75	
CCT	3K 4K 6K RD GR BL PK		
Body Material	Polycarbonate		
Optical Cover	Polycarbonate		
Luminous Flux (lm)	300	500	700
CRI	≥ 80		
Driver	Integral		
PF	≥ 0.50		

PRITHVI
CRC140



Wattage	6W	12W
Type	Junction Box Light	
Dimension (D×H) (mm)	80×65	140×65
Cutout (mm)	45	45
CCT	3K 4K 6K RD GR BL PK	
Body Material	Polycarbonate	
Optical Cover	Polycarbonate	
Luminous Flux (lm)	660	1320
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.6	

DENIM
CRC10/B



Wattage	8W	10W	15W	20W	24W	30W	36W
Type	Movable COB Spot Light						
Dimension (D×H) (mm)	95×58	95×72	120×70	120×80	145×83	145×83	160×82
Cutout (mm)	86	86	110	110	128	128	147
CCT	3K 4K 5K 6K & 3 STEP only in 8W, 10W & 15W						
Body Material	Aluminium PDC						
Optical Cover	Transparent						
Beam Angle	60° (Darkoo)						
Luminous Flux (lm)	880	1100	1650	2200	2640	3300	3960
CRI	≥ 80						
Driver	External						
PF	≥ 0.95						


CRC50



Wattage	3W	6W	9W	12W	16W	24W	30W	50W
Type	Movable COB Spot Light							
Dimension (D×H) (mm)	64×47	88×62	88×62	114×77	114×77	135×101	160×102	195×104
Cutout (mm)	57	77	77	97	97	123	140	170
CCT	3K 4K 6K (RD, GR, BL only in 3W)							
Body Material	Aluminium PDC							
Optical Cover	Transparent							
Beam Angle	60°							
Luminous Flux (lm)	300	600	900	1200	1600	2400	3000	5000
CRI	≥ 80							
Driver	External							
PF	≥ 0.50						≥ 0.95	

SATURN

CRC160

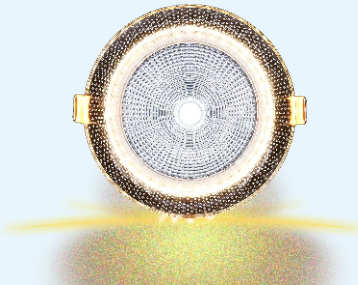

Wattage	8 + 8W							
Type	Two Color Step COB Spot Light							
Dim. (L×B×H) (mm)	110×55							
Cutout (mm)	88							
CCT	6K + 3K RD GR BL PK PL RGB							
Body Material	Polycarbonate							
Optical Cover	Transparent							
Beam Angle	60°							
Luminous Flux (lm)	880							
CRI	≥ 80							
Driver	Integral							
PF	≥ 0.50							

LYCRA

CRC70



Wattage	3W		6W	
Type	COB Spot Light			
Dimension (D×H) (mm)	50×35		60×55	
Cutout (mm)	26		46	
CCT	3K 4K 6K			
Body Material	Aluminium PDC			
Optical Cover	Transparent			
Luminous Flux (lm)	330		660	
CRI	≥ 80			
Driver	External			
PF	≥ 0.50		≥ 0.9	

WOOL

CRC120



Wattage	3W	7W	12W
Type	COB Spot Light		
Dimension (D×H) (mm)	38×40	57×70	68×80
Cutout (mm)	35	55	60
CCT	3K 4K 6K		
Body Material	Aluminium PDC		
Optical Cover	High Efficiency Lens		
Beam Angle	45°		
Luminous Flux (lm)	330	770	1320
CRI	≥ 80		
Driver	External		
PF	≥ 0.50	≥ 0.9	≥ 0.95

SILK
CRC20/A



Wattage	3W	6W	10W	15W	20W
Type	COB Spot Light				
Dimension (D×H) (mm)	45×40	60×56	75×70	83×80	98×100
Cutout (mm)	38	52	65	75	90
CCT	3K 4K 6K				
Body Material	Aluminium PDC				
Optical Cover	Transparent				
Beam Angle	45°				
Luminous Flux (lm)	330	660	1100	1650	2200
CRI	≥ 80				
Driver	External				
PF	≥ 0.50		≥ 0.95		
Outer + Inner Ring Color	BK + SN GD RG SB			PKW + SN GD RG SW	

COTTON⁺
CRC20/B



Wattage	6W	10W	15W
Type	Deep Recessed COB Spot Light		
Dimension (D×H) (mm)	60×65	80×90	93×105
Cutout (mm)	56	72	80
CCT	3K 4K 5K 6K & 3 STEP		
Body Material	Aluminium PDC		
Optical Cover	Transparent (With Lens)		
Beam Angle	30°		
Luminous Flux (lm)	720	1200	1800
CRI	≥ 80		
Driver	External		
PF	≥ 0.95		
Body Color	BK PKW		

SATIN
CRC110



Wattage	5W	12W	18W
Type	COB Spot Light		
Dimension (D×H) (mm)	40×56	59×79	75×100
Cutout (mm)	34	57	70
CCT	3K 4K 6K		
Body Material	Aluminium PDC		
Optical Cover	Transparent		
Beam Angle	30°		
Luminous Flux (lm)	500	1200	1800
CRI	≥ 80		
Driver	External		
PF	≥ 0.95		
Body Color	PKW GREY		

CRC10-Z



Wattage	30W
Type	Zoom COB Light
Dimension (D×H) (mm)	145×120
Cutout (mm)	125
CCT	3K 4K 6K
Body Material	Aluminium PDC
Optical Cover	Transparent
Beam Angle	45°
Luminous Flux (lm)	3000
CRI	≥ 80
Driver	External
PF	≥ 0.95

MERCURY

CRC90



Wattage	1W
Type	Cabinet COB Light
Dimension (D×H) (mm)	38×20
Cutout (mm)	30
CCT	3K 4K 6K RD GR BL PK
Body Material	Polycarbonate
Optical Cover	PS Diffuser
Luminous Flux (lm)	80
CRI	≥ 80
Driver	Driver on Board
PF	≥ 0.50

CRC60/A



Wattage	1W	3W
Type	COB Spot Light	
Dimension (D×H) (mm)	31×18	42×27
Cutout (mm)	24	35
CCT	3K 4K 6K RD GR BL PK	
Body Material	Aluminium PDC	
Optical Cover	Transparent	
Luminous Flux (lm)	100	300
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.95	

CRP30



Wattage	3W
Type	COB Spot Light
Dimension (D×H) (mm)	50×35
Cutout (mm)	38
CCT	6K
Body Material	Aluminium PDC
Optical Cover	Transparent
Luminous Flux (lm)	300
CRI	≥ 80
Driver	External
PF	≥ 0.50

CRYSTAL

CRG20/D



Wattage	3W	6W
Type	COB Spot Light	
Dimension (D×H) (mm)	39×25	65×70
Cutout (mm)	25	60
CCT	3K 4K 6K	
Body Material	Aluminium PDC	
Optical Cover	Transparent	
Beam Angle	38°	
Luminous Flux (lm)	330	660
CRI	≥ 80	
Driver	External / Integral	
PF	≥ 0.50	
Body Color	BK PKW RG	

CRC60/B
(SQ / RO)



Wattage	3W	5W
Type	Surface COB Light	
Dimension (D×H) (mm)	60×27	75×27
CCT	6K	
Body Material	Aluminium PDC	
Optical Cover	Transparent	
Luminous Flux (lm)	300	500
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.50	

CRC60/C
(SQ / RO)




Wattage	3W	6W	12W
Type	SMD Cabinet Light		
Dimension (D×H) (mm)	60×10	90×20	150×20
CCT	3K 4K 6K		
Body Material	Aluminium PDC		
Optical Cover	Polycarbonate		
Beam Angle	120°		
Luminous Flux (lm)	255	510	1020
CRI	≥ 80		
Driver	Driver on Board		
PF	≥ 0.95		

CRC60/D



Wattage	3W	5W	7W
Type	COB Cabinet Light		
Dimension (D×H) (mm)	60×20	75×20	95×25
CCT	3K 4K 6K		
Body Material	Aluminium PDC		
Optical Cover	Transparent (With Lens)		
Beam Angle	30°		
Luminous Flux (lm)	300	500	700
CRI	≥ 80		
Driver	Driver on Board		
PF	≥ 0.95		

CRC60/E

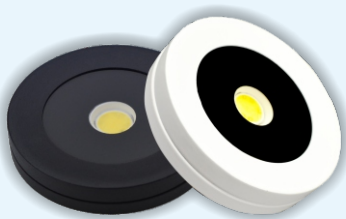

Wattage	3W	5W
Type	COB Cabinet Light	
Dimension (D×H) (mm)	60×14	74×16
CCT	3K 4K 6K	
Body Material	Aluminium PDC	
Optical Cover	Transparent	
Beam Angle	110°	
Luminous Flux (lm)	270	450
CRI	≥ 80	
Driver	Driver on Board	
PF	≥ 0.9	
Body Color	BK PKW	

CRC50-SF



IP
IP54

Wattage	16W	30W
Type	Surface COB Cylinder	
Outer (mm)	120×62	120×128
CCT	3K 4K 6K	
Body Material	Aluminium PDC	
Optical Cover	Transparent	
Beam Angle	60°	
Luminous Flux (lm)	1600	3000
CRI	≥ 80	
Driver	External	
PF	≥ 0.50	≥ 0.95
IP Rating	IP54	

CRG80-SF



IP
IP54


Wattage	6W	12W	16W	20W
Type	Surface COB Cylinder			
Dimension (D×H) (mm)	60×80	80×100	90×110	90×150
CCT	3K 4K 6K			
Body Material	Aluminium PDC			
Optical Cover	Transparent			
Beam Angle	60°			
Luminous Flux (lm)	600	1200	1600	2000
CRI	≥ 80			
Driver	Integral			
PF	≥ 0.50			
IP Rating	IP54			
Body Color	BK PKW			

CRT10AL



Wattage	36W
Type	LED Tube Light AL
CCT	3K 4K 6K
Body Material	Aluminium Profile
Optical Cover	Polycarbonate
Luminous Flux (lm)	3600
CRI	≥ 80
Driver	Integral
PF	≥ 0.95

MATRIXAL CRT5



Wattage	5W	10W	22W
Type	LED Tube Light AL		
Dimension (L×W×H) (mm)	321×21×33	588×21×33	1202×21×33
CCT	3K 4K 6K RD GR BL PK		
Body Material	Aluminium Profile		
Optical Cover	Polycarbonate		
Luminous Flux (lm)	500	1000	2200
CRI	≥ 80		
Driver	Integral		
PF	≥ 0.95		

HELIX

CRT11



Wattage	36W
Type	LED Office Light
Dimension (L×W×H) (mm)	1200×60×35
CCT	3K 4K 6K
Body Material	Aluminium Profile
Optical Cover	Polycarbonate
Luminous Flux (lm)	3600
CRI	≥ 80
Driver	Integral
PF	≥ 0.95

BULKHEAD

CRW20



Anti Theft Clamp

IP
IP54 **IP**
IP65

Wattage	4W	8W (ANTI THEFT)
Type	LED Bulkhead	
Dimension (L×W×H) (mm)	115×70×60	210×85×60
CCT	3K 4K 6K RD GR BL PK	
Body Material	ABS	
Optical Cover	Polycarbonate	
Luminous Flux (lm)	400	800
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.50	≥ 0.95
IP Rating	IP54	IP65

BULKHEAD

CRW30



IP
IP65

Wattage	10W	15W
Type	LED Bulkhead	
Dimension (L×W×H) (mm)	175×100×65	230×100×65
CCT	3K 4K 6K RD GR BL PK	
Body Material	Polycarbonate	
Optical Cover	Polycarbonate	
Luminous Flux (lm)	1000	1500
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.95	
IP Rating	IP65	

WEATHER PROOF

CRW10



IP
IP65

Wattage	20W	40W
Type	Weather Proof Light	
Dimension (L×W×H) (mm)	585×85×70	1175×85×70
CCT	3K 4K 6K	
Body Material	Polycarbonate	
Optical Cover	Polycarbonate	
Luminous Flux (lm)	1800	3600
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.95	
IP Rating	IP65	

CRF10




IP
IP65

Wattage	30W	50W
Type	COB Flood Light	
CCT	3K 4K 6K RD GR BL PK	
Body Material	Aluminium PDC	
Optical Cover	Toughened Glass	
Luminous Flux (lm)	3000	5000
LED Life Span	50000 Hours	
CRI	≥ 80	
SPD	2.5kV*	
PF	≥ 0.95	
IP Rating	IP65	

*we can offer SPD upto 20kV on request

CRF40/B

(Reflector)



IP
IP65

Wattage	25W	50W	100W
Type	LED Flood Light (Reflector)		
CCT	3K 4K 6K RD GR BL		
Body Material	Aluminium PDC		
Optical Cover	Toughened Glass		
Luminous Flux (lm)	2500	5000	10000
LED Life Span	50000 Hours		
CRI	≥ 80		
SPD	4.5kV*	6kV*	
PF	≥ 0.95		
IP Rating	IP65		

*we can offer SPD upto 20kV on request

CRF40

(Hoardings)



IP
IP65

Wattage	20W	40W	80W
Type	LED Flood Light (Hoardings) (With Reflector / Lens)		
CCT	3K 4K 6K		
Body Material	Aluminium PDC		
Optical Cover	Toughened Glass		
Luminous Flux (lm)	Reflector / Lens 2000	Reflector / Lens 4000	Reflector / Lens 8000
LED Life Span	50000 Hours		
CRI	≥ 80		
SPD	2.5kV	4.5kV	6kV
PF	≥ 0.95		
IP Rating	IP65		

CRF50



IP
IP65

Wattage	150W	250W	350W
Type	LED Flood Light		
CCT	3K 4K 6K RD GR BL		
Body Material	Aluminium PDC		
Optical Cover	Toughened Glass		
Luminous Flux (lm)	16500	27500	38500
LED Life Span	50000 Hours		
CRI	≥ 80		
SPD	6kV*		
PF	≥ 0.95		
IP Rating	IP65		

*we can offer SPD upto 20kV on request

AGNI
CRF60



IP
IP66

Wattage	30W	50W	100W	150W	200W
Type	LED Flood Light				
CCT	3K 4K 6K RD GR BL				
Body Material	Aluminium PDC				
Optical Cover	Polycarbonate				
Luminous Flux (lm)	3600	6000	12000	18000	24000
LED Life Span	50000 Hours				
CRI	≥ 80				
SPD	4kV*	6kV*		6kV + 5kV Potted External*	
PF	≥ 0.95				
IP Rating	IP66				

*we can offer SPD upto 20kV on request

GINGER
CRF70



IP
IP65

Wattage	150W				
Type	LED Flood Light				
CCT	6K				
Body Material	Aluminium PDC				
Optical Cover	Toughened Glass				
Luminous Flux (lm)	15000				
LED Life Span	50000 Hours				
CRI	≥ 80				
SPD	5kV External (Potted)*				
PF	≥ 0.95				
IP Rating	IP65				

*we can offer SPD upto 20kV on request

TUCSON
CRF80




IP
IP66

Wattage	10W	30W	50W	100W	150W	200W
Type	LED Flood Light					
CCT	3K 6K (RGB with Remote in 10W to 100W)					
Body Material	Aluminium PDC					
Optical Cover	Toughened Glass					
Luminous Flux (lm)	1000	3000	5000	10000	15000	20000
LED Life Span	50000 Hours					
CRI	≥ 80					
SPD	5kV External (Potted)*					
PF	≥ 0.95					
IP Rating	IP66					

*we can offer SPD upto 20kV on request

TORNADO
CRF100

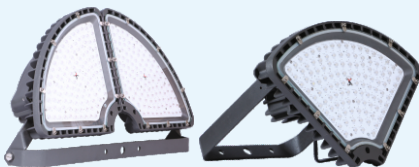


IP
IP65

Wattage	250W		500W	
Type	LED Flood Light			
CCT	6K			
Body Material	Aluminium PDC			
Optical Cover	Toughened Glass (with Lens)			
Luminous Flux (lm)	30000		60000	
LED Life Span	50000 Hours			
CRI	≥ 80			
SPD	6kV*			
PF	≥ 0.95			
IP Rating	IP65			

*we can offer SPD upto 20kV on request

CRS30



IP
IP65

Wattage	60W	72W	90W	120W	150W	180W
Type	LED Street Light					
CCT	3K 4K 6K					
Body Material	Aluminium PDC					
Optical Cover	Toughened Glass					
Luminous Flux (lm)	6000	7200	9000	12000	15000	18000
LED Life Span	50000 Hours					
CRI	≥ 80					
SPD	6kV*					
IP Rating	IP65					
Pipe Diameter (mm)	50	64				

*we can offer SPD upto 20kV on request

CRS40



IP
IP65

Wattage	20W	24W	30W	40W	45W	60W	72W
Type	LED Street Light						
CCT	3K 4K 6K						
Body Material	Aluminium PDC						
Optical Cover	Polycarbonate						
Luminous Flux (lm)	2200	2880	3300	4400	4950	6600	7920
LED Life Span	50000 Hours						
CRI	≥ 80						
SPD	2.5kV*	4kV*	6kV*				
IP Rating	IP65						
Pipe Diameter (mm)	45					50	

*we can offer SPD upto 20kV on request

BULLET
CRS50



IP
IP65

Wattage	15W	18W	24W	30W	36W	45W	60W	72W
Type	LED Street Light (Reflector)							
CCT	3K 4K 6K							
Body Material	Aluminium PDC							
Optical Cover	Toughened Glass							
Luminous Flux (lm)	1650	1980	2640	3300	3960	4950	6600	7920
LED Life Span	50000 Hours							
CRI	≥ 80							
SPD	2.5kV*	4kV*	6kV*					
IP Rating	IP65							
Pipe Diameter (mm)	32	45				53		

*we can offer SPD upto 20kV on request

AGNI
CRS80



IP
IP66

Wattage	20W	30W	45W	60W	72W	90W	120W	150W
Type	LED Street Light (Lens Type)							
CCT	3K 4K 6K							
Body Material	Aluminium PDC							
Optical Cover	Polycarbonate (with Lens)							
Luminous Flux (lm)	2200	3300	4950	6600	7920	9900	13200	16500
LED Life Span	50000 Hours							
CRI	≥ 80							
Lens Beam Angle	80° × 145°							
SPD	2.5kV*	4kV*	6kV*					
IP Rating	IP66							
Pipe Diameter (mm)	32	45				50		

*we can offer SPD upto 20kV on request

RAW

CRS70



IP
IP65

Wattage	12W	20W	30W	12W-DC
Type	LED Street Light			
CCT	3K 4K 6K			
Body Material	Polycarbonate			
Optical Cover	Polycarbonate			
Luminous Flux (lm)	1440	2400	3600	1440
LED Life Span	50000 Hours			
CRI	≥ 80			
SPD	2.5kV			
IP Rating	IP65			
Pipe Diameter (mm)	25		42	25

CRU01



IP
IP65

Wattage	120W
Type	LED Highbay Light
CCT	3K 4K 6K
Body Material	Aluminium PDC
Optical Cover	Polycarbonate
Luminous Flux (lm)	12000
LED Life Span	50000 Hours
CRI	≥ 80
Driver	Integral
PF	≥ 0.95
SPD	6kV*
IP Rating	IP65

*we can offer SPD upto 20kV on request

CRU04/B



IP
IP65

Wattage	60W	120W	150W	200	220
Type	LED Highbay Light				
CCT	3K 4K 6K				
Body Material	Aluminium PDC				
Optical Cover	Polycarbonate				
Luminous Flux (lm)	6600	13200	16500	22000	24200
LED Life Span	50000 Hours				
CRI	≥ 80				
Driver	Integral				
PF	≥ 0.95				
SPD	6kV*				
IP Rating	IP65				

*we can offer SPD upto 20kV on request

CRU04/B

With Lens



IP
IP65

Wattage	60W	120W	150W	200	220
Type	LED Highbay Light (Lens Type)				
CCT	3K 4K 6K				
Body Material	Aluminium PDC				
Optical Cover	Polycarbonate				
Luminous Flux (lm)	6600	13200	16500	22000	24200
Beam Angle	60°				
LED Life Span	50000 Hours				
CRI	≥ 80				
Driver	Integral				
PF	≥ 0.95				
SPD	6kV*				
IP Rating	IP65				

*we can offer SPD upto 20kV on request

CRH/WG



IP
IP54

Wattage	30W	60W
Type	LED Well Glass	
CCT	3K 4K 6K	
Body Material	Aluminium PDC	
Optical Cover	Polycarbonate	
Luminous Flux (lm)	3300	6600
LED Life Span	50000 Hours	
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.95	
SPD	4kV	6kV
IP Rating	IP54	

CRU03



IP
IP65

Wattage	60W
Type	LED Highbay Light
CCT	6K
Body Material	Aluminium PDC
Optical Cover	Polycarbonate
Luminous Flux (lm)	6600
LED Life Span	50000 Hours
CRI	≥ 80
Driver	Integral
PF	≥ 0.95
SPD	6kV*
IP Rating	IP65

*we can offer SPD upto 20kV on request

CRP10 / CRP20



CRP 10 Mirror Light

CRP 20 Mirror Light

Wattage	6W	12W
Type	Mirror Light	
CCT	3K 6K	
Body Material	Aluminium	
Optical Cover	PS Diffuser	
Luminous Flux (lm)	540	1080
CRI	≥ 80	
Driver	External	
PF	≥ 0.50	

CRP30

Picture Light



Wattage	3W	5W
Type	Picture Light	
CCT	3K 6K	
Body Material	Aluminium	
Optical Cover	Transparent	
Luminous Flux (lm)	270	450
CRI	≥ 80	
Driver	External	
PF	≥ 0.50	

GLORY

CRCL10



IP
IP20

Wattage	10W	15W	22W
Type	LED Ceiling Light		
Dimension (D×H) (mm)	225×65	280×70	350×75
CCT	3K 4K 6K		
Luminous Flux (lm)	900	1350	1980
Body Material	Aluminium		
Optical Cover	Acrylic		
CRI	≥ 80		
Driver	Integral		
PF	≥ 0.95		
IP Rating	IP20		

MOON

CRCL20



IP
IP65

Wattage	18W
Type	LED Ceiling Light
Dimension (D×H) (mm)	245×50
CCT	3K 4K 6K
Body Material	Polycarbonate
Optical Cover	Polycarbonate
Luminous Flux (lm)	1620
CRI	≥ 80
Driver	Integral
PF	≥ 0.95
IP Rating	IP65

GRILLE

CRCS30



Wattage	2.5W	2.5W×2	2.5W×5	2.5W×10	6W	6W×3	6W×5
Type	LED Spot Light						
Dim. (L×D×H) (mm)	46×46×47	68×35×50	140×35×50	280×45×50	66×66×57	160×68×62	253×68×62
Cutout (mm)	33×33	62×31	134×31	268×31	55×55	150×55	245×55
CCT	3K 4K						
Body Material	Aluminium						
Optical Cover	Transparent						
Beam Angle	30°						
Luminous Flux (lm)	225	450	1250	2250	540	1620	2700
CRI	≥ 80						
Driver	External						
PF	≥ 0.65						

CRC MR16



Wattage	10W
Type	COB Spot Light
Dim. (D×H) (mm)	150×70
Cutout (mm)	148
CCT	3K 4K 6K
Body Material	Aluminium PDC
Optical Cover	Transparent
Luminous Flux (lm)	1100
CRI	≥ 80
Driver	External
PF	≥ 0.9

CRCQR111



Wattage	10W	10W×2	20W	20W×2
Type	COB Spot Light			
Dim. (L×D×H) (mm)	135×135×78	240×135×78	157×157×93	280×157×93
Cutout (mm)	115	115×215	135	135×255
Locking Height (mm)	15	15	30	30
CCT	3K 4K 6K			
Body Material	Aluminium PDC			
Optical Cover	Transparent			
Luminous Flux (lm)	1100	2200	2200	4400
CRI	≥ 80			
Driver	Integral			
PF	≥ 0.9			

CRG70/SF

Wall Light



Wattage	3W	6W	10W	20W	30W
Type	Slim Wall Light				
CCT	3K 4K 6K				
Body Material	Aluminium PDC				
Optical Cover	Transparent				
Beam Angle	38°				
Luminous Flux (lm)	300	600	1000	2000	3000
CRI	≥ 80				
Driver	External				
PF	≥ 0.50			≥ 0.95	
Body Color	BK / PKW				

CRG70

Slim Track Light with Lens / Reflector



Wattage	10W	20W	30W
Type	Slim Track Light		
CCT	3K 4K 6K		
Body Material	Aluminium PDC		
Optical Cover	Transparent with Lens / Transparent		
Beam Angle	38°		
Luminous Flux (lm)	1000	2000	3000
CRI	≥ 80		
Driver	Integral		
PF	≥ 0.50	≥ 0.95	
Body Color	BK / PKW		

CRTR10/SF



Wattage	9W	16W	24W	30W	50W
Type	COB Wall Light				
CCT	3K 4K 6K				
Body Material	Aluminium PDC				
Optical Cover	Transparent				
Beam Angle	60°				
Luminous Flux (lm)	900	1600	2400	3000	5000
CRI	≥ 80				
Driver	External				
PF	≥ 0.50			≥ 0.95	
Body Color	PKW				

CRTR10



Wattage	9W	16W	24W	30W	50W
Type	COB Track Light				
CCT	3K 4K 6K				
Body Material	Aluminium PDC				
Optical Cover	Transparent				
Beam Angle	60°				
Luminous Flux (lm)	900	1600	2400	3000	5000
CRI	≥ 80				
Driver	Integral				
PF	≥ 0.50			≥ 0.95	
Body Color	BK / PKW				

TRACK LINE &


Track Line Connectors



Model	Track Line for Track Lights		
Length	1 Mtr.		
Wiring System	Single Phase		
Body Material	Aluminium Profile		
Capacity	6W to 50W Track Lights		
Body Color	BK / PKW		

Model No.	CTC0001	CTC0002	CTC0003
Type	Track Line Connectors		
Variant	L Way	2 Way	4 Way
Body Color	BK / PKW		


CRG30/A

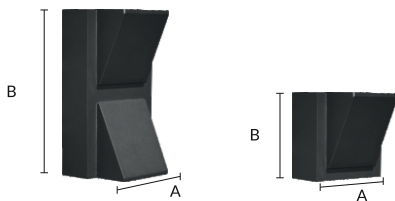

IP
IP65

Wattage	3W	2×3W
Type	Up Down Light	
Dim.(A×B) (mm)	80×75	80×143
CCT	3K 4K	
Body Material	Aluminium PDC	
Optical Cover	Transparent	
Beam Angle	45°	
Luminous Flux (lm)	300	600
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.50	
IP Rating	IP65	

CRG30/B

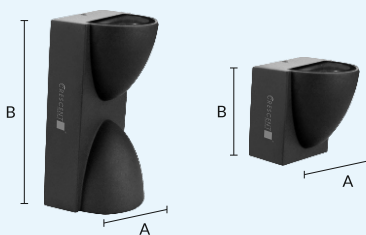

IP
IP65


Wattage	5W	2×5W
Type	Up Down Light	
Dim.(A×B) (mm)	80×75	80×143
CCT	3K 4K	
Body Material	Aluminium PDC	
Optical Cover	Transparent	
Beam Angle	45°	
Luminous Flux (lm)	500	1000
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.50	
IP Rating	IP65	

CRG30/C




Wattage	5W	2×5W	2×9W
Type	Up Down Light		
Dim.(A×B) (mm)	60×77	60×123	80×189
CCT	3K 4K 6K		
Body Material	Aluminium PDC		
Optical Cover	Transparent		
Luminous Flux (lm)	500	1000	1800
CRI	≥ 80		
Driver	Integral		
PF	≥ 0.50		
Body Color	BK PKW		
IP Rating	IP65		

CRG30/D

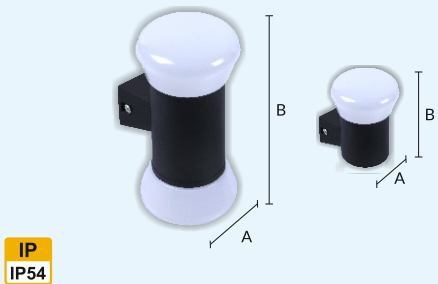


Wattage	5W	2×5W	9W	2×9W
Type	Up Down Light			
Dim.(A×B) (mm)	81×102	81×170	81×173	95×205
CCT	3K 4K			
Body Material	Aluminium PDC			
Optical Cover	Polycarbonate			
Luminous Flux (lm)	500	1000	900	1800
CRI	≥ 80			
PF	≥ 0.9			
Body Color	BK			
IP Rating	IP54			

CRG30/E

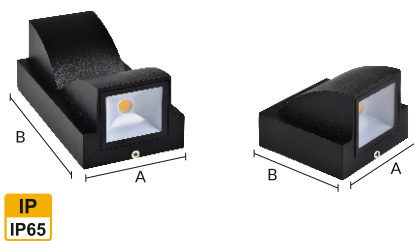


Wattage	5W	2×5W
Type	Up Down Light	
Dim.(A×B) (mm)	81×80	81×143
CCT	3K 4K	
Body Material	Aluminium PDC	
Optical Cover	Transparent	
Beam Angle	45°	
Luminous Flux (lm)	500	1000
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.50	
IP Rating	IP65	

CRG30/F

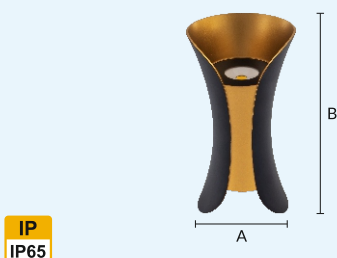

Wattage	2×5W	2×9W
Type	Up Down Light	
Dim.(A×B) (mm)	70×152	100×200
CCT	3K 4K	
Body Material	Aluminium	
Optical Cover	Transparent	
Beam Angle	45°	
Luminous Flux (lm)	1000	1800
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.50	
Body Color	GD + BK	
IP Rating	IP65	

CRG60/A



IP
IP54

Wattage	2×1W
Type	Up Down Light
Dim.(A×B) (mm)	78×78
CCT	3K
Body Material	Aluminium PDC
Optical Cover	Lens
Beam Angle	45°
Luminous Flux (lm)	200
CRI	≥ 80
Driver	Integral
PF	≥ 0.50
IP Rating	IP54

CRG60/B



IP
IP54

Wattage	4×1W
Type	Up Down Light
Dim.(A×B) (mm)	116×80
CCT	3K
Body Material	Aluminium PDC
Optical Cover	Lens
Beam Angle	45°
Luminous Flux (lm)	400
CRI	≥ 80
Driver	Integral
PF	≥ 0.50
IP Rating	IP54


CRG60/C



IP
IP54

Wattage	6×1W
Type	Up Down Light
Dim.(A×B) (mm)	167×80
CCT	3K
Body Material	Aluminium PDC
Optical Cover	Lens
Beam Angle	45°
Luminous Flux (lm)	600
CRI	≥ 80
Driver	Integral
PF	≥ 0.50
IP Rating	IP54

CRG60/D

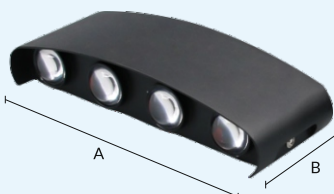

IP
IP54

Wattage	8×1W
Type	Up Down Light
Dim.(A×B) (mm)	207×80
CCT	3K
Body Material	Aluminium PDC
Optical Cover	Lens
Beam Angle	45°
Luminous Flux (lm)	800
CRI	≥ 80
Driver	Integral
PF	≥ 0.50
IP Rating	IP54


CRG90/A



IP
IP54

Wattage	4W
Type	Up Down Light
Dim.(A×B) (mm)	115×90
CCT	3K
Body Material	Aluminium PDC
Optical Cover	Transparent
Beam Angle	120°
Luminous Flux (lm)	400
CRI	≥ 80
Driver	Integral
PF	≥ 0.65
IP Rating	IP54


CRG90/B

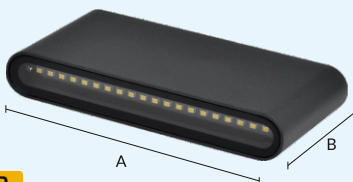

IP
IP54

Wattage	8W
Type	Up Down Light
Dim.(A×B) (mm)	175×90
CCT	3K
Body Material	Aluminium PDC
Optical Cover	Transparent
Beam Angle	120°
Luminous Flux (lm)	800
CRI	≥ 80
Driver	Integral
PF	≥ 0.50
IP Rating	IP54


CRG40

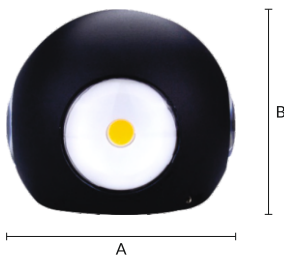

IP
IP65

Wattage	4×3W
Type	4 Way Wall Light
Dim.(A×B) (mm)	111×90
CCT	3K 4K
Body Material	Aluminium PDC
Optical Cover	Transparent (Lens)
Luminous Flux (lm)	1200
CRI	≥ 80
Driver	Integral
PF	≥ 0.65
IP Rating	IP65


CRG40/B

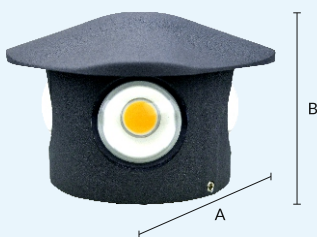

IP
IP65

Wattage	4×3W
Type	4 Way Wall Light
Dim.(A×B) (mm)	105×75
CCT	3K 4K
Body Material	Aluminium PDC
Optical Cover	Transparent (Lens)
Luminous Flux (lm)	1200
CRI	≥ 80
Driver	Integral
PF	≥ 0.50
IP Rating	IP65


CRG40/C & CRG40/CM

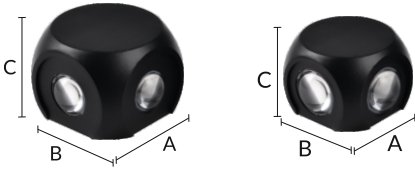

IP
IP65

Wattage	4×1W (CRG40/C)	4×1W (CRG40/CM)
Type	4 Way Wall Light	
Dim. (A×B×C) (mm)	90×90×65	70×70×45
CCT	3K	3K R+G+B+Y
Body Material	Aluminium PDC	
Optical Cover	Transparent (Lens)	
Beam Angle	45°	
Luminous Flux (lm)	400	
CRI	≥ 80	
Driver	Integral	
PF	≥ 0.50	
IP Rating	IP65	

CRG10/A



IP
IP54

Wattage	12W
Type	Wall Light
Dim. (A×B) (mm)	162×205
CCT	3K
Body Material	Aluminium Sheet Metal
Optical Cover	Polycarbonate
Luminous Flux (lm)	1080
CRI	≥ 80
Driver	Integral
PF	≥ 0.95
IP Rating	IP54

CRG10/B



IP
IP54

Wattage	12W
Type	Wall Light
Dim. (A×B×C) (mm)	200×86×104
CCT	3K
Body Material	Aluminium PDC
Optical Cover	Polycarbonate
Luminous Flux (lm)	1080
CRI	≥ 80
Driver	Integral
PF	≥ 0.95
IP Rating	IP54


CRG10/C



IP
IP54

Wattage	12W
Type	Wall Light
Dim. (A×B) (mm)	101×230
CCT	3K
Body Material	Aluminium PDC
Optical Cover	Polycarbonate
Luminous Flux (lm)	1080
CRI	≥ 80
Driver	Integral
PF	≥ 0.95
IP Rating	IP54

CRG10/D



IP
IP54

Wattage	4x3W
Type	4 Way Wall Light
Dim. (AxB) (mm)	160x160
CCT	3K
Body Material	Aluminium PDC
Optical Cover	Polycarbonate
Luminous Flux (lm)	1080
CRI	≥ 80
Driver	Integral
PF	≥ 0.50
IP Rating	IP54

SUNFLOWER

CRG20



IP
IP65

Wattage	5W	9W	12W	6W	12W
Type	Spike Garden Light				
CCT	3K 6K GR BL			RGB	
Body Material	Aluminium PDC				
Optical Cover	Transparent				
Luminous Flux (lm)	500	900	1200	-	-
CRI	≥ 80				
Driver	Integral				
PF	≥ 0.50				
IP Rating	IP65				

CRG50/A

(SQ/RO)



IP
IP20

Wattage	3W
Type	LED Foot Light (for Indoor Use Only)
Outer (mm)	60
Cutout (DxH) (mm)	55x45
CCT	3K 6K
Body Material	Aluminium PDC
Optical Cover	Acrylic
Luminous Flux (lm)	270
CRI	≥ 80
Driver	External
PF	≥ 0.50
Shape	SQ RO
IP Rating	IP20

CRG50/D

(SQ/RO)



IP
IP20

Wattage	3W
Type	LED Foot Light (for Indoor Use Only)
Outer (mm)	60
Cutout (DxH) (mm)	55x45
CCT	3K 6K
Body Material	Aluminium PDC
Optical Cover	Acrylic
Luminous Flux (lm)	270
CRI	≥ 80
Driver	External
PF	≥ 0.50
Shape	SQ RO
Body Color	BK PKW
IP Rating	IP20


CRG50/B



IP
IP65

Wattage	2W	3W	5W
Type	LED Foot Light		
Outer LxW(mm)	60x60	85x85	125x85
Cutout LxWxB (mm)	50x50x28	70x70x38	110x70x40
CCT	3K 6K		
Body Material	Aluminium PDC		
Optical Cover	Milky Glass		
Luminous Flux (lm)	180	270	540
CRI	≥ 80		
Driver	Integral		
PF	≥ 0.9		
IP Rating	IP65		

CRG50/C



IP
IP65

Wattage	3W		
Type	LED Foot Light		
Outer LxW(mm)	85x85		
Cutout LxWxB (mm)	70x70x38		
CCT	3K 6K		
Body Material	Aluminium PDC		
Optical Cover	Milky Glass		
Luminous Flux (lm)	270		
CRI	≥ 80		
Driver	Integral		
PF	≥ 0.50		
IP Rating	IP65		

LED STRIP 5050



Model	5050		
LED Per Meter	60	30	60
Type	LED Strip Light		
Watt Per Meter	12W		
CCT	3K 4K 6K RD GR BL PK AM	RGB	
Strip Width (mm)	10		
Output Voltage	12V		
Suitable SMPS	12V SMPS		
CRI	≥ 80		
LED Life Span	50000 Hours		
Reel Length	5 Mtr.		
Smart Controller	12V - 100W (Dimmable)	12V - RGB	

LED STRIP 2835



Model	2835			
LED Per Meter	60	120	180	240
Type	LED Strip Light			
Watt Per Meter	6W	12W	18W	18W
CCT	3K 4K 6K RD GR BL PK AM IB	3K 4K 6K RD GR BL PK AM	3K 4K 6K RD GR BL	3K 4K 6K RD GR BL PK AM
Strip Width (mm)	8	8	9.5	9.5
Output Voltage	12V			
Suitable SMPS	12V SMPS			
CRI	≥ 80			
LED Life Span	50000 Hours			
Reel Length	5 Mtr.			
Smart Controller	12V - 100W (Dimmable)			

SMD ROPE & SMD TIRANGA ROPE



Model	2835	2835 (Tiranga)	5050
No. of LED Per Mtr.	120	72	60
Rope Length Mtr.	50	18	50
Type	SMD Rope Light		
CCT	3K 4K 6K RD GR BL PK AM IB	Tiranga	RGB
Watt Per Meter	6W	7W	10W
Power Requirement	240 V AC, 50-60Hz		
CRI	≥ 80		
Driver	SMD Rope Cord Connector		
IP Rating	IP65		

BOLLARD
CGL0050/A



IP
IP65

Wattage	10W
Type	Bollard
CCT	3K 4K 6K
Height (mm)	600
Luminous Flux (lm)	1000
CRI	≥ 80
Body Material	Aluminium PDC
Optical Cover	Transparent
Driver	Integral
PF	≥ 0.95
IP Rating	IP65


SG559



IP
IP65

Wattage	12W
Type	LED Wall Light
CCT	3K 6K
Luminous Flux (lm)	960
CRI	≥ 80
Body Material	Polycarbonate
Driver	Integral
PF	≥ 0.95
IP Rating	IP65

WALL BRACKET
CRS20 (A+C)

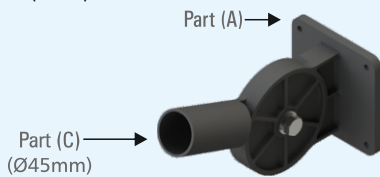


Model	A + C Wall Bracket
Application	For Wall Mounting Street Lights
Suitable	45mm or Larger Diameter Fitting Street Light
Body Material	Aluminium PDC

PF METER
CPM0001



Model	Power Factor Meter
Application	To Measure Actual Parameters
Displayed Parameters	Input Voltage
	Input Current
	Input Wattage
	Power Factor

Manufacturing Facilities

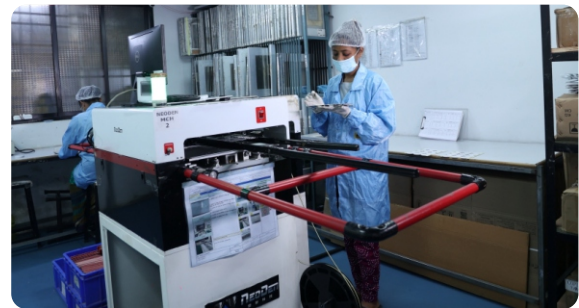

In-house Injection Moulding Facility



In-house Driver Manufacturing Facility





MADE IN INDIA

CRESCENT OPTO PVT. LTD.

Customer Care : +91 95124 00080 | Website : www.crescentlighting.in | Email : customercare@crescentlighting.in

